Listing and Technical Evaluation Report™

A Duly Authenticated Report from an Approved Agency

Report No: 2102-04

Issue Date: July 20, 2022

Revision Date: October 23, 2026

Subject to Renewal: October 1, 2027

CAMO® 5/16" Structural Series Screw for Use in Multi-Ply Truss, Sawn Lumber, and Structural Composite Lumber (SCL) Assemblies

Trade Secret Report Holder:

National Nail® Corporation dba CAMO®

Phone: 800-968-6245 Website: www.nationalnail.com or www.camofasteners.com

CSI Designations:

DIVISION: 06 00 00 - WOOD, PLASTICS AND COMPOSITES Section: 06 05 23 - Wood, Plastic, and Composite Fastenings

1 Innovative Product Evaluated[1]

1.1 CAMO 5/16" Structural Series Screws

2 Product Description and Materials

2.1 The innovative product evaluated in this report is shown in **Figure 1**.

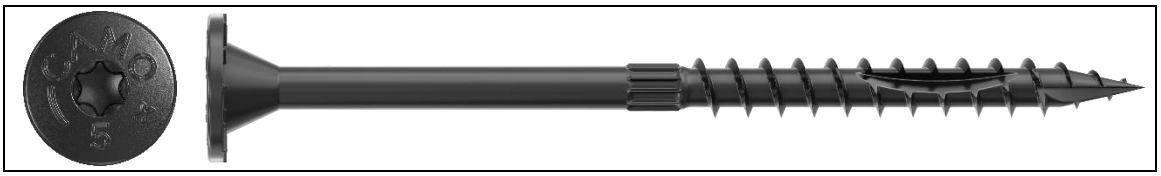


Figure 1. CAMO 5/16" Structural Series Screws

2.2 CAMO 5/16" Structural Series Screws are threaded fasteners manufactured using standard cold-forming processes and are subsequently heat-treated and coated.

2.3 CAMO 5/16" Structural Series Screws are available with a proprietary coating system designated as PROTECH™ Ultra 4.

2.4 CAMO 5/16" Structural Series Screws have a round flat head with a T40 star drive and are partially threaded.

2.5 *Fastener Material*

2.5.1 CAMO 5/16" Structural Series Screws are made of hardened carbon steel grade 10B18, 1022, or 10B21 wire conforming to ASTM A510 and/or Grade 17MnB3 or 19MnB4 wire conforming to DIN 1654.

2.5.2 CAMO 5/16" Structural Series Screws, evaluated in this report are set forth in **Table 1**.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

Table 1. Properties of CAMO $^5/_{16}$" Structural Series Screws[1]

Fastener Designation	Head[6]				Length (in)		Diameter (in)			Bending Yield Strength,[4] f_{yb} (psi)	Allowable Steel Strength (lbs)	
	Style	Drive System	Diameter (in)	Height (in)	Fastener[2]	Thread[3]	Shank	Minor	Major		Tensile	Shear[5]
$^5/_{16}$" x $2^7/_8$"	Flat Head	T40 Star Drive	0.738"	0.079"	2.875	1.437	0.220	0.197	0.307	175,000	1,580	1,150
$^5/_{16}$" x $3^1/_2$"					3.500	2.000						
$^5/_{16}$" x 4"					4.000	2.370						
$^5/_{16}$" x $4^1/_2$"					4.500	2.370						
$^5/_{16}$" x 5"					5.000	2.752						
$^5/_{16}$" x 6"					6.000	2.752						
$^5/_{16}$" x $6^3/_4$"					6.750	2.752						

SI: 1 in = 25.4 mm, 1 lb = 4.45 N, 1-psi = 0.00689 MPa

1. Tabulated fastener dimensions are measured on uncoated fasteners. Finished dimensions are different due to the proprietary coating added.
2. Nominal fastener length is measured from the underside of the head to the tip.
3. Thread length includes tapered tip.
4. Bending yield strength, F_{yb}, is determined in accordance with ASTM F1575 using minor thread diameter when fastener is tested in the threaded section.
5. Shear strength is determined in accordance with AISI S904 using minor thread diameter when fastener is tested in the threaded section.
6. Fasteners with PROTECH Ultra 4, PROTECH, and Easy Inspection Hi-Vis Pink coatings are recognized for use in pressure-preservative-treated wood as specified in Sections 2.5 and 2.6, subject to the Conditions of Use in Section 12.

2.6 *Corrosion Resistance*

2.6.1 CAMO $^5/_{16}$" Structural Series Screws may be used where screws are required to exhibit corrosion resistance when exposed to adverse environmental conditions and/or in chemically treated wood, which are subject to the limitations of this report and are alternatives to hot-dipped galvanized screws with a coating weight in compliance with ASTM A153, Class D.

2.6.2 CAMO $^5/_{16}$" Structural Series Screws having the proprietary PROTECH Ultra 4 coatings are equivalent to the protection provided by code-approved hot-dipped galvanized coatings meeting ASTM A153, Class D (IBC Section 2304.10.6[2] and IRC Section R304.3[3]) when recognized for use by the American Wood Protection Association (AWPA) in untreated wood and Ground Contact – General Use pressure-treated wood for exterior, freshwater, general construction applications (i.e., Ground Contact – General Use AWPA UC1 UC4A).

2.6.3 *Fire-Retardant Treated (FRT) Wood Applications:*

2.6.3.1 CAMO $^5/_{16}$" Structural Series Screws, with the proprietary PROTECH Ultra 4 coatings, are recognized for use in FRT lumber provided the conditions set forth by the FRT lumber manufacturer be met, including appropriate strength reductions.

2.7 *Wood Material*

2.7.1 Wood main and side members consisting of solid-sawn lumber or boards must have an assigned specific gravity as given in **Table 2**.

2.7.2 Structural Composite Lumber (SCL) main and side members must have a specific gravity of 0.50 or greater as shown in **Table 3**.

2.8 As needed, review material properties for design in **Section 6** and the regulatory evaluation in **Section 8**.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

3 Definitions[4]

3.1 New Materials[5] are defined as building materials, equipment, appliances, systems, or methods of construction, not provided for by prescriptive and/or legislatively adopted regulations, known as alternative materials.[6] The design strength and permissible stresses shall be established by tests[7] and/or engineering analysis.[8]

3.2 Duly authenticated reports[9] and research reports[10] are test reports and related engineering evaluations that are written by an approved agency[11] and/or an approved source.[12]

3.2.1 This report utilizes intellectual property and/or trade secrets to create public domain material properties for commercial end-use.

3.2.1.1 This report protects confidential Intellectual Property and trade secrets under the regulation, 18.US.Code.90, also known as Defend Trade Secrets Act of 2016 (DTSA).[13]

3.3 An approved agency is *"approved"* when it is ANAB ISO/IEC 17065 accredited. DrJ Engineering, LLC (DrJ) is accredited and listed in the ANAB directory.

3.4 An approved source is *"approved"* when a professional engineer (i.e., Registered Design Professional, hereinafter RDP) is properly licensed to transact engineering commerce. The regulatory authority governing approved sources is the state legislature via its professional engineering regulations.[14]

3.5 Testing and/or inspections conducted for this duly authenticated report were performed by an ISO/IEC 17025 accredited testing laboratory, an ISO/IEC 17020 accredited inspection body, and/or a licensed RDP.

3.5.1 The Center for Building Innovation (CBI) is ANAB[15] ISO/IEC 17025 and ISO/IEC 17020 accredited.

3.6 The regulatory authority shall enforce[16] the specific provisions of each legislatively adopted regulation. If there is a non-conformance, the specific regulatory section and language of the non-conformance shall be provided in writing[17] stating the nonconformance and the path to its cure.

3.7 The regulatory authority shall accept duly authenticated reports from an approved agency and/or an approved source with respect to the quality and manner of use of new materials or assemblies as provided for in regulations regarding the use of alternative materials, designs, or methods of construction.[18]

3.8 ANAB is an International Accreditation Forum (IAF) Multilateral Recognition Arrangement (MLA) signatory. Therefore, recognition of certificates and validation statements issued by conformity assessment bodies accredited by all other signatories of the IAF MLA with the appropriate scope shall be approved.[19] Thus, all ANAB ISO/IEC 17065 duly authenticated reports are approval equivalent,[20] and can be used in any country that is an MLA signatory found at this link: https://iaf.nu/en/recognised-abs/

3.9 Approval equity is a fundamental commercial and legal principle.[21]

4 Applicable Local, State, and Federal Approvals; Standards; Regulations[22]

4.1 *Local, State, and Federal*

4.1.1 Approved in all local jurisdictions pursuant to ISO/IEC 17065 duly authenticated report use, which includes, but is not limited to, the following featured local jurisdictions: Austin, Baltimore, Broward County, Chicago, Clark County, Dade County, Dallas, Detroit, Denver, DuPage County, Fort Worth, Houston, Kansas City, King County, Knoxville, Las Vegas, Los Angeles City, Los Angeles County, Miami, Nashville, New York City, Omaha, Philadelphia, Phoenix, Portland, San Antonio, San Diego, San Jose, San Francisco, Seattle, Sioux Falls, South Holland, St. Louis County, Texas Department of Insurance, and Wichita.[23]

4.1.2 Approved in all state jurisdictions pursuant to ISO/IEC 17065 duly authenticated report use, which includes, but is not limited to, the following featured states: California, Florida, New Jersey, Oregon, New York, Texas, Washington, and Wisconsin.[24]

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

4.1.3 Approved by the Code of Federal Regulations Manufactured Home Construction: Pursuant to Title 24, Subtitle B, Chapter XX, Part 3282.14[25] and Part 3280[26] pursuant to the use of ISO/IEC 17065 duly authenticated reports.

4.1.4 Approved means complying with the requirements of local, state, or federal legislation.

4.2 *Regulations*

4.2.1 *IBC – 18, 21, 24: International Building Code®*

4.2.2 *IRC – 18, 21, 24: International Residential Code®*

4.2.3 *FBC-B – 20, 23: Florida Building Code[27] – Building (FL41741)*

4.2.4 *FBC-R – 20, 23: Florida Building Code[27] – Residential (FL41741)*

4.2.5 *LABC – 23, 25: Los Angeles Building Code[28]*

4.2.6 *LARC – 23, 25: Los Angeles Residential Code[28]*

4.3 *Standards*

4.3.1 *AISI S904: Standard Test Methods for Determining the Tensile and Shear of Screws*

4.3.2 *ANSI/AWC NDS: National Design Specification (NDS) for Wood Construction*

4.3.3 *ASTM A153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware*

4.3.4 *ASTM A510: Standard Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel, and Alloy Steel*

4.3.5 *ASTM B117: Standard Practice for Operating Salt Spray (Fog) Apparatus*

4.3.6 *ASTM D1761: Standard Test Methods for Mechanical Fasteners in Wood*

4.3.7 *ASTM F1575: Standard Test Method for Determining Bending Yield Moment of Nails*

4.3.8 *ASTM G85: Standard Practice for Modified Salt Spray (Fog) Testing*

4.3.9 *ASTM G198: Standard Test Method for Determining the Relative Corrosion Performance of Driven Fasteners in Contact with Treated Wood*

5 Listed[29]

5.1 Equipment, materials, products, or services included in a List published by a nationally recognized testing laboratory (e.g., CBI), an approved agency (e.g., CBI and DrJ), and/or an approved source (e.g., DrJ), or other organization(s) concerned with product evaluation (e.g., DrJ), that maintains periodic inspection (e.g., CBI) of production of listed equipment or materials, and whose listing states either that the equipment or material meets nationally recognized standards or has been tested and found suitable for use in a specified manner.

6 Tabulated Properties Generated from Nationally Recognized Standards

6.1 CAMO $^{5}/_{16}$" Structural Series Screws are used for attaching multi-ply wood members, including trusses, sawn lumber, and SCL products.

6.2 *Design*

6.2.1 Design of CAMO $^{5}/_{16}$" Structural Series Screws is governed by the applicable code and the provisions for dowel type fasteners in the NDS.

6.2.2 Unless otherwise noted, adjustment of the design stresses for duration of load shall be in accordance with the applicable code.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

6.3 *Multi-Ply Connection Design Values*

6.3.1 *CAMO 5/16" Structural Series Screws for Multi-Ply Truss and Sawn Lumber Assemblies:*

6.3.1.1 Sawn lumber design values are provided for assemblies with two, three, or four plies in **Table 2**. Assembly conditions are detailed in **Figure 2**.

Table 2. Allowable Lateral Design Values (plf) for Multi-ply Truss and Sawn Lumber Assemblies[2,3,4,5,6]

Fastener	Assembly	Members	Fastener Length[1] (in)	SPF/HF (0.42)						DF/SP (0.50)					
				12" o.c.		16" o.c.		24" o.c.		12" o.c.		16" o.c.		24" o.c.	
				Number of Fasteners per Row											
				2	3	2	3	2	3	2	3	2	3	2	3
5/16" x 2 7/8"	A	2-Ply 1 1/2"	2 7/8"	1320	1980	990	1485	660	990	1680	2520	1265	1900	840	1260
5/16" x 4"	B	3-Ply 1 1/2"	4"	990	1485	745	1120	495	745	1260	1890	945	1420	630	945
5/16" x 4 1/2"	B	3-Ply 1 1/2"	4 1/2"	990	1485	745	1120	495	745	1260	1890	945	1420	630	945
5/16" x 6"	C	4-Ply 1 1/2"	6"	1575	2365	1185	1780	790	1185	2040	3060	1535	2305	1020	1530

SI: 1 in = 25.4 mm, 1 lb/ft = 0.0146 kN/m

1. Fastener length is measured from the underside of the head to the tip.
2. Wood framing shall be any species with Specific Gravity (SG) of 0.42 or greater. For wood species with an assigned SG between 0.42 and 0.50, use the tabulated values for SG of 0.42. For wood species with an assigned SG greater than 0.50, use the tabulated values for SG of 0.50. SPF = Spruce-Pine-Fir; HF = Hem-Fir; DF = Douglas Fir-Larch; SP = Southern Pine.
3. Allowable design values are based on a load duration factor C_D = 1.0 and shall be multiplied by all applicable adjustment factors per the NDS.
4. The tabulated allowable design loads may be applied to either side of the beam (head or point side of the fastener). Where loads are applied to both sides of the beam simultaneously, the total load applied to the beam shall not exceed the tabulated load.
5. For top-loaded members with even loading across the width of the entire assembly, fasteners shall be installed in two (2) rows with a maximum distance of 32" o.c. between fasteners in the same row.
6. Tabulated loads are for the connection strength. Beams and framing members shall be independently checked by a registered design professional.

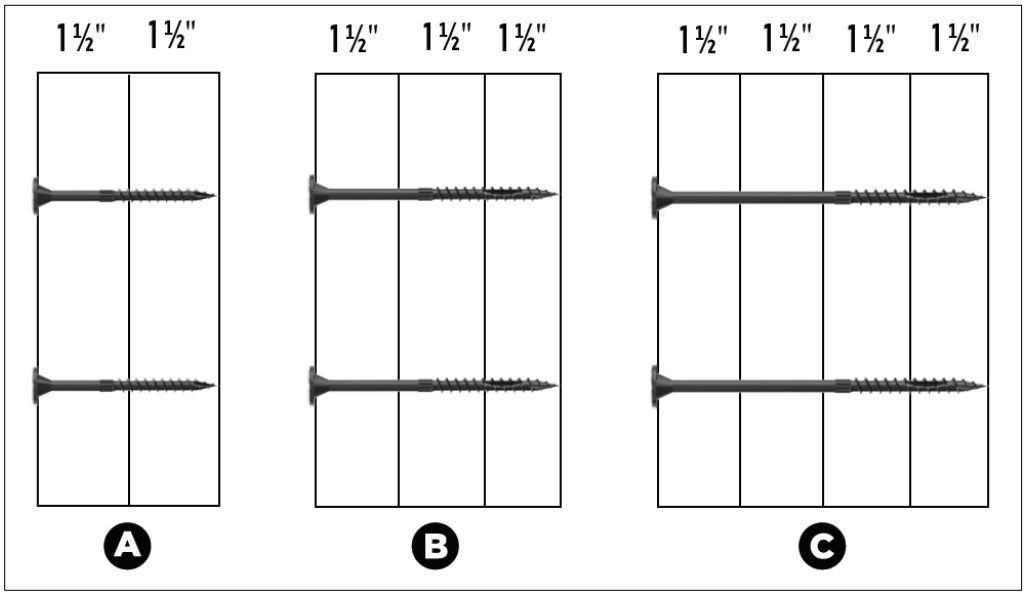


Figure 2. Truss and Sawn Lumber Assembly Configuration

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

6.3.2 *CAMO 5/16" Structural Series Screws for Multi-Ply Structural Composite Lumber (SCL) Assemblies:*

6.3.2.1 SCL is a family of engineered wood products that includes but is not limited to, Laminated Veneer Lumber (LVL), Laminated Strand Lumber (LSL), Parallel Strand Lumber (PSL), and Oriented Strand Lumber (OSL).

6.3.2.2 CAMO 5/16" Structural Series Screws SCL design values are provided for assemblies with two, three, or four plies in **Table 3**. Assembly conditions are detailed in **Figure 3**.

Table 3. Allowable Lateral Design Values (plf) for Multi-Ply Truss and SCL Assemblies[2,3,4,5,6]

Fastener	Assembly	Members	Fastener Length[1] (in)	12" o.c.		16" o.c.		24" o.c.	
				Number of Fasteners per Row					
				2	3	2	3	2	3
5/16" x 3 1/2"	A	2-ply 1 3/4"	3 1/2"	1680	2520	1265	1900	840	1260
5/16" x 5"	B	3-ply 1 3/4"	5"	2295	3445	1725	2590	1150	1725
5/16" x 6 3/4"	C	4-ply 1 3/4"	6 3/4"	2040	3060	1535	2305	1020	1530
5/16" x 5"	D	2-ply 1 3/4" & 3 1/2"	5"	2295	3445	1725	2590	1150	1725
5/16" x 6 3/4"	E	3-ply 1 3/4" & 3 1/2"	6 3/4"	2040	3060	1535	2305	1020	1530
5/16" x 6 3/4"	F	2-ply 3 1/2"	6 3/4"	3060	4590	2300	3450	1530	2295

SI: 1 in = 25.4 mm, 1 lb/ft = 0.0146 kN/m

1. Fastener length is measured from the underside of the head to the tip.
2. SCL shall have a SG of 0.50 or greater. Thicknesses listed in **Figure 3** are minimums.
3. Allowable design values are based on a load duration factor of C_D = 1.0 and shall be multiplied by all applicable adjustment factors per the NDS.
4. The tabulated allowable design loads may be applied to either side of the beam (head or point side of the fastener). Where loads are applied to both sides of the beam simultaneously, the total load applied to the beam shall not exceed the tabulated load.
5. For top-loaded members with even loading across the width of the entire assembly and a depth of 18" or less, fasteners shall be installed in two (2) rows with a maximum distance of 24" o.c. between fasteners in the same row. Use three (3) rows for members deeper than 18".
6. Tabulated loads are for the connection strength. Beams and framing members shall be independently checked by a registered design professional.

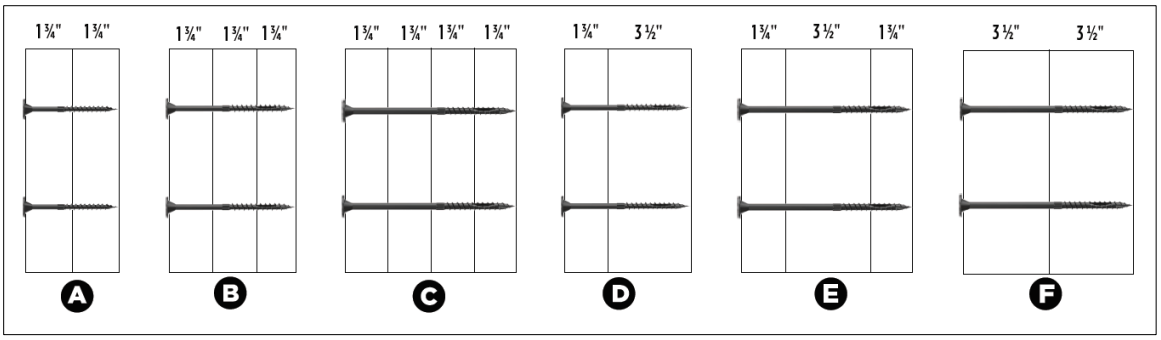


Figure 3. SCL Assembly Configurations

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

6.4 *Spacing, Edge Distance, and End Distance*

6.4.1 CAMO $^{5}/_{16}$" Structural Series Screws spacing, edge distance, and end distances shall be as specified in **Table 4**.

Table 4. Screw Spacing, Edge Distance, and End Distance Requirements[1,2]

Connection Geometry	Minimum Spacing (in)
Edge Distance –Load in any direction	$^{5}/_{8}$"
End Distance – Load parallel to grain, towards end	$3^{3}/_{8}$"
End Distance – Load perpendicular to grain, away from end	$2^{1}/_{4}$"
End Distance – Load perpendicular to grain	$2^{1}/_{4}$"
Spacing between Fasteners in a Row – Parallel to grain	$3^{3}/_{8}$"
Spacing between Fasteners in a Row – Perpendicular to grain	$2^{1}/_{4}$"
Spacing between Rows of Fasteners – In-line	$1^{1}/_{8}$"
Spacing between Rows of Fasteners – Staggered[2]	$^{5}/_{8}$"

SI: 1 in = 25.4 mm

1. Edge distances, end distances, and spacing of fasteners shall be sufficient to prevent splitting of the wood or as shown in this table, whichever is the more restrictive.
2. Values for "*Spacing between Rows of Fasteners-Staggered*" apply where the screws in adjacent rows are offset by one-half of the "*Spacing between Fasteners in a Row*".

6.5 Alternative techniques shall be permitted in accordance with accepted engineering practice and experience. These provisions for the use of alternative materials, designs, and methods of construction are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed herein. This includes, but is not limited to, the following areas of engineering: mechanics of materials, structures, building science, and fire science.

7 Certified Performance[30]

7.1 All construction methods shall conform to accepted engineering practices to ensure durable, livable, and safe construction and shall demonstrate acceptable workmanship reflecting journeyman quality of work of the various trades.[31]

7.2 The strength and rigidity of the component parts and/or the integrated structure shall be determined by engineering analysis or by suitable load tests to simulate the actual loads and conditions of application that occur.[32]

8 Regulatory Evaluation and Accepted Engineering Practice

8.1 CAMO $^{5}/_{16}$" Structural Series Screws were evaluated for their ability to provide multi-ply attachment in trusses, sawn lumber, and SCL applications.

8.2 Corrosion resistance was evaluated in accordance with ASTM B117, ASTM G85, and ASTM G198.

8.3 Use of fasteners in locations exposed to saltwater or saltwater spray is outside the scope of this report.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

8.4 Any building code, regulation and/or accepted engineering evaluations (e.g., research reports, duly authenticated reports, etc.) that are conducted for this Listing were performed by DrJ, which is an ISO/IEC 17065 accredited certification body and a professional engineering company operated by RDP or approved sources. DrJ is qualified[33] to practice product and regulatory compliance services within its scope of accreditation and engineering expertise,[34] respectively.

8.5 Engineering evaluations are conducted with DrJ's ANAB accredited ICS code scope of expertise, which is also its areas of professional engineering competence.

9 Installation

9.1 Installation shall comply with the approved construction documents, the manufacturer installation instructions, this report, and the applicable building code.

9.2 In the event of a conflict between the manufacturer installation instructions and this report, contact the manufacturer for counsel on the proper installation method.

9.3 *Installation Procedure*

9.3.1 Fasteners shall be installed with a $^{1}/_{2}$" (12.7 mm), low rpm/high torque electric drill (450 rpm).

9.3.2 Fasteners shall be installed with manufacturer-supplied bits.

9.3.3 Fasteners shall be installed with the underside of the head flush to the surface of the wood member. Fasteners shall not be overdriven.

9.3.4 Fasteners shall not be struck with a hammer during installation.

9.3.5 Lead holes are not required but may be used where lumber is prone to splitting.

9.3.6 Installer shall use appropriate/required personal protection equipment during installation and must not place fastener in mouth.

10 Substantiating Data

10.1 Testing has been performed under the supervision of a professional engineer and/or under the requirements of ISO/IEC 17025 as follows:

10.1.1 Properties for CAMO $^{5}/_{16}$" Structural Series Screws from Report Number 2102-01.

10.2 Information contained herein may include the result of testing and/or data analysis by sources that are approved agencies, approved sources, and/or an RDP. Accuracy of external test data and resulting analysis is relied upon.

10.3 Where applicable, testing and/or engineering analysis are based upon provisions that have been codified into law through state or local adoption of regulations and standards. The developers of these regulations and standards are responsible for the reliability of published content. DrJ's engineering practice may use a regulation-adopted provision as the control. A regulation-endorsed control versus a simulation of the conditions of application to occur establishes a new material as being equivalent to the regulatory provision in terms of quality, strength, effectiveness, fire resistance, durability, and safety.

10.4 The accuracy of the provisions provided herein may be reliant upon the published properties of raw materials, which are defined by the grade mark, grade stamp, mill certificate, or duly authenticated reports from approved agencies and/or approved sources provided by the supplier. These are presumed to be minimum properties and relied upon to be accurate. The reliability of DrJ's engineering practice, as contained in this duly authenticated report, may be dependent upon published design properties by others.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

10.5 *Testing and Engineering Analysis*

10.5.1 The strength, rigidity, and/or general performance of component parts and/or the integrated structure are determined by suitable tests that simulate the actual conditions of application that occur and/or by accepted engineering practice and experience.[35]

10.6 Where additional condition of use and/or regulatory compliance information is required, please search for CAMO $^{5}/_{16}$" Structural Series Screws on the DrJ Certification website.

11 Findings

11.1 As outlined in **Section 6**, CAMO $^{5}/_{16}$" Structural Series Screws have performance characteristics that were tested and/or meet applicable regulations. In addition, they are suitable for use pursuant to its specified purpose.

11.2 When used and installed in accordance with this duly authenticated report and the manufacturer installation instructions, CAMO $^{5}/_{16}$" Structural Series Screws shall be approved for the following applications:

11.2.1 To provide multi-ply attachment in trusses, sawn lumber, and SCL assemblies.

11.3 Unless exempt by state statute, when CAMO $^{5}/_{16}$" Structural Series Screws are to be used as a structural and/or building envelope component in the design of a specific building, the design shall be performed by an RDP.

11.4 Any application specific issues not addressed herein can be engineered by an RDP. Assistance with engineering is available from National Nail Corporation.

11.5 IBC Section 104.2.3[36] (IRC Section R104.2.2[37] and IFC Section 104.2.3[38] are similar) in pertinent part state:

> **104.2.3 Alternative Materials, Design and Methods of Construction and Equipment.** The provisions of this code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by this code, provided that any such alternative is not specifically prohibited by this code and has been approved.

11.6 **Approved:**[39] Building regulations require that the building official shall accept duly authenticated reports.[40]

11.6.1 An approved agency is *"approved"* when it is ANAB ISO/IEC 17065 accredited.

11.6.2 An approved source is *"approved"* when an RDP is properly licensed to transact engineering commerce.

11.6.3 Federal law, Title 18 US Code Section 242, requires that, where the alternative product, material, service, design, assembly, and/or method of construction is not approved, the building official shall respond in writing, stating the reasons why the alternative was not approved. Denial without written reason deprives a protected right to free and fair competition in the marketplace.

11.7 DrJ is a licensed engineering company, employs licensed RDPs and is an ANAB Accredited Product Certification Body – Accreditation #1131.

11.8 Through the IAF Multilateral Arrangement (MLA), this duly authenticated report can be used to obtain product approval in any jurisdiction or country because all ANAB ISO/IEC 17065 duly authenticated reports are equivalent.[41]

12 Conditions of Use

12.1 As defined in **Section 6**, where material and/or engineering mechanics properties are created for load resisting design purposes, the resistance to the applied load shall not exceed the ability of the defined properties to resist those loads using the principles of accepted engineering practice.

12.2 Moisture content of CAMO $^{5}/_{16}$" Structural Series Screws shall be less than or equal to nineteen percent (19%) for sawn lumber and less than or equal to sixteen percent (16%) for SCL products.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

12.3 Use of fasteners in locations exposed to saltwater or saltwater spray is outside the scope of this evaluation report.

12.4 When required by adopted legislation and enforced by the building official, also known as the Authority Having Jurisdiction (AHJ) in which the project is to be constructed:

12.4.1 Any calculations incorporated into the construction documents shall conform to accepted engineering practice and, when prepared by an approved source, shall be approved when signed and sealed.

12.4.2 This report and the installation instructions shall be submitted at the time of permit application.

12.4.3 At a minimum, this innovative product shall be installed per **Section 9**.

12.4.4 The review of this report by the AHJ shall comply with IBC Section 104.2.3.2 and IBC Section 105.3.1.

12.4.5 This innovative product has an internal quality control program and a third party quality assurance program in accordance with IBC Section 104.7.2, IBC Section 110.4, IBC Section 1703, IRC Section R104.7.2, and IRC Section R109.2.

12.4.6 The application of this innovative product in the context of this report is dependent upon the accuracy of the construction documents, implementation of installation instructions, inspection as required by IBC Section 110.3, IRC Section R109.2, and any other regulatory requirements that may apply.

12.5 The approval of this report by the AHJ shall comply with IBC Section 1707.1, where legislation states in part, *"the building official shall make, or cause to be made, the necessary tests and investigations; or the building official shall accept duly authenticated reports from approved agencies in respect to the quality and manner of use of new materials or assemblies as provided for in Section 104.2.3"*, all of IBC Section 104, and IBC Section 105.3.

12.6 Design loads shall be determined in accordance with the regulations adopted by the jurisdiction in which the project is to be constructed and/or by the building designer (i.e., owner or RDP).

12.7 The actual design, suitability, and use of this report for any particular building, is the responsibility of the owner or the authorized agent of the owner.

13 Identification

13.1 CAMO $^{5}/_{16}$" Structural Series Screws, as listed in **Section 1.1**, are identified by a label on the board or packaging material bearing the manufacturer name, product name, this report number, and other information to confirm code compliance.

13.2 Additional technical information can be found at www.nationalnail.com or www.camofasteners.com.

14 Review Schedule

14.1 This report is subject to periodic review and revision. For the latest version, visit www.drjcertification.org.

14.2 For information on the status of this report, please contact DrJ Certification.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

Issue Date: July 20, 2022
Supplement Revision Date: August 29, 2025
Subject to Renewal: October 1, 2027

FBC Supplement to Report Number 2102-04

REPORT HOLDER: National Nail® Corporation

1 Evaluation Subject

1.1 CAMO $^{5}/_{16}$" Structural Series Screws

2 Purpose and Scope

2.1 Purpose

2.1.1 The purpose of this Report Supplement is to show CAMO $^{5}/_{16}$" Structural Series Screws, recognized in Report Number 2102-04, have also been evaluated for compliance with the codes listed below as adopted by the Florida Building Commission.

2.2 *Applicable Code Editions*

2.2.1 *FBC-B—20, 23: Florida Building Code – Building (FL41741)*

2.2.2 *FBC-R—20, 23: Florida Building Code – Residential (FL41741)*

3 Conclusions

3.1 CAMO $^{5}/_{16}$" Structural Series Screws, described in Report Number 2102-04, comply with the FBC-B and FBC-R and are subject to the conditions of use described in this supplement.

3.2 Where there are variations between the IBC and IRC and the FBC-B and FBC-R applicable to this report, they are listed here:

3.2.1 FBC-B Section 104 is reserved.

3.2.2 FBC-B Section 110.4 is reserved and replaces IBC Section 110.4.

3.2.3 FBC-B Section 104.6 is reserved and replaces IBC Section 104.4.

3.2.4 FBC-B Section 104.11 replaces IBC Section 104.2.3 and Section 104.2.3.2.

3.2.5 FBC-B Section 105.3 replaces IBC Section 105.3.

3.2.6 FBC-B Section 105.3.1 replaces IBC Section 105.3.1.

3.2.7 FBC-B Section 110.3 replaces IBC Section 110.3.

3.2.8 FBC-B Section 1707.1 replaces IBC Section 1707.1.

3.2.9 FBC-B Section 2304.10.5 replaces IBC Section 2304.10.6.

3.2.10 FBC-B Section 2306.1 replaces IBC Section 2306.1.

3.2.11 FBC-B Section 2306.3 replaces IBC Section 2306.3.

3.2.12 FBC-R Section R104 and Section R109 are reserved.

3.2.13 FBC-R Section R317.3 replaces IRC Section R304.3.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

4 Conditions of Use

4.1 CAMO $^{5}/_{16}$" Structural Series Screws, described in Report Number 2102-04, must comply with all of the following conditions:

4.1.1 All applicable sections in Report Number 2102-04.

4.1.2 The design, installation, and inspections are in accordance with additional requirements of FBC-B Chapter 16 and Chapter 17, as applicable.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

Issue Date: July 20, 2022
Supplement Revision Date: August 29, 2025
Subject to Renewal: October 1, 2027

LABC and LARC Supplement to Report Number 2102-04

REPORT HOLDER: National Nail® Corporation

1 Evaluation Subject

1.1 CAMO $^{5}/_{16}$" Structural Series Screws

2 Purpose and Scope

2.1 Purpose

2.1.1 The purpose of this Report Supplement is to show CAMO $^{5}/_{16}$" Structural Series Screws, recognized in Report Number 2102-04 have also been evaluated for compliance with the codes listed below as adopted by the Los Angeles Department of Building and Safety (LADBS).

2.2 *Applicable Code Editions*

2.2.1 *LABC—23, 25: Los Angeles Building Code*

2.2.2 *LARC—23, 25: Los Angeles Residential Code*

3 Conclusions

3.1 CAMO $^{5}/_{16}$" Structural Series Screws, described in Report Number 2102-04, comply with the LABC and LARC and are subject to the conditions of use described in this supplement.

3.2 Where there are variations between the IBC and IRC and the LABC and LARC applicable to this report, they are listed here:

3.2.1 LABC Section 104.2 replaces IBC Section 104.

3.2.2 LABC Section 104.2.3 replaces IBC Section 104.4.

3.2.3 LABC Section 104.2.6 replaces IBC Section 104.2.3 and Section 104.2.3.2.

3.2.4 LABC Section 106.3.1 replaces IBC Section 105.3.

3.2.5 LABC Section 108.1 replaces IBC Section 110.4.

3.2.6 LABC Section 108.5 replaces IBC Section 110.3.

3.2.7 LABC Section 1707.1 replaces IBC Section 1707.1.

3.2.8 LABC Section 2304.10.6 replaces IBC Section 2304.10.6.

3.2.9 LABC Section 2306.3 replaces IBC Section 2306.3.

3.2.10 LARC Section 104.2.6 replaces IRC Section R104.2.2.

3.2.11 LARC Section 108.1 replaces IRC Section R109.2.

3.2.12 LARC Section R317.3 replaces IRC Section R304.3.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

4 Conditions of Use

4.1 CAMO $^{5}/_{16}$" Structural Series Screws, described in Report Number 2102-04, must comply with all of the following conditions:

4.1.1 All applicable sections in Report Number 2102-04.

4.1.2 The design, installation, and inspections are in accordance with additional requirements of LABC Chapter 16 and Chapter 17, as applicable.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

Notes

1 For more information, visit drjcertification.org or call us at 608-310-6748.

2 2018 IBC Section 2304.10.5

3 2021 IRC Section R317.3

4 Capitalized terms and responsibilities are defined pursuant to the applicable building code, applicable reference standards, the latest edition of TPI 1, the NDS, AISI S202, US professional engineering law, Canadian building code, Canada professional engineering law, Qualtim External Appendix A: Definitions/Commentary, Qualtim External Appendix B: Project/Deliverables, Qualtim External Appendix C: Intellectual Property and Trade Secrets, definitions created within Design Drawings and/or definitions within Reference Sheets. Beyond this, terms not defined shall have ordinarily accepted meanings as the context implies. Words used in the present tense include the future; words stated in the masculine gender include the feminine and neuter; the singular number includes the plural and the plural, the singular.

5 https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1702

6 Alternative Materials, Design and Methods of Construction and Equipment: The provisions of any regulation code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by a regulation. Please review https://www.justice.gov/atr/mission and https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#104.2.3

7 https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1706.2:~:text=the%20design%20strengths%20and%20permissible%20stresses%20shall%20be%20established%20by%20tests

8 The design strengths and permissible stresses of any structural material shall conform to the specifications and methods of design of accepted engineering practice. https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1706.1:~:text=Conformance%20to%20Standards-,The%20design%20strengths%20and%20permissible%20stresses,-of%20any%20structural

9 https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1707.1:~:text=the%20building%20official%20shall%20make%2C%20or%20cause%20to%20be%20made%2C%20the%20necessary%20tests%20and%20investigations%3B%20or%20the%20building%20official%20shall%20accept%20duly%20authenticated%20reports%20from%20approved%20agencies%20in%20respect%20to%20the%20quality%20and%20manner%20of%20use%20of%20new%20materials%20or%20assemblies%20as%20provided%20for%20in%20Section%20104.2.3.

10 https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1703.4.2

11 https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#approved_agency

12 https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#approved_source

13 https://www.law.cornell.edu/uscode/text/18/1832 (b) Any organization that commits any offense described in subsection (a) shall be fined not more than the greater of $5,000,000 or 3 times the value of the stolen trade secret to the organization, including expenses for research and design and other costs of reproducing the trade secret that the organization has thereby avoided. The federal government and each state have a public records act. To follow DTSA and comply state public records and trade secret legislation requires approval through ANAB ISO/IEC 17065 accredited certification bodies or approved sources. For more information, please review this website: Intellectual Property and Trade Secrets.

14 https://www.nspe.org/resources/issues-and-advocacy/professional-policies-and-position-statements/regulation-professional AND https://apassociation.org/list-of-engineering-boards-in-each-state-archive/

15 https://www.cbitest.com/accreditation/

16 https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#104.1:~:text=directed%20to%20enforce%20the%20provisions%20of%20this%20code

17 https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#104.2.3 AND https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#105.3.1

18 https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1707.1

19 https://iaf.nu/en/about-iaf-mla/#:~:text=Once%20an%20accreditation%20body%20is%20a%20signatory%20of%20the%20IAF%20MLA%2C%20it%20is%20required%20to%20recognise%20certificates%20and%20validation%20and%20verification%20statements%20issued%20by%20conformity%20assessment%20bodies%20accredited%20by%20all%20other%20signatories%20of%20the%20IAF%20MLA%2C%20with%20the%20appropriate%20scope

20 True for all ANAB accredited product evaluation agencies and all International Trade Agreements.

21 https://www.justice.gov/crt/deprivation-rights-under-color-law AND https://www.justice.gov/atr/mission

22 Unless otherwise noted, the links referenced herein use un-amended versions of the 2024 International Code Council (ICC) 2024 International Code Council (ICC) model codes as foundation references. Mississippi versions of the IBC 2024 and the IRC 2024 are un-amended. This material, product, design, service and/or method of construction also complies with the 2000-2012 versions of the referenced codes and the standards referenced therein. As pertinent to this technical and code compliance evaluation, CBI and/or DrJ staff have reviewed any state or local regulatory amendments to assure this report is in compliance.

23 See Adoptions by Publisher for the latest adoption of a non-amended or amended model code by the local jurisdiction. https://up.codes/codes/general

24 See Adoptions by Publisher for the latest adoption of a non-amended or amended model code by state. https://up.codes/codes/general

25 https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3282/subpart-A/section-3282.14

26 https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280

27 All references to the FBC-B and FBC-R are the same as the 2024 IBC and 2024 IRC unless otherwise noted in the Florida Supplement at the end of this report.

28 All references to the LABC and LARC are the same as the 2024 IBC and 2024 IRC unless otherwise noted in the Los Angeles Supplement at the end of this report.

29 https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#p-3280.2(Listed%20or%20certified); https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#listed AND https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#labeled

30 https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1703.4

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC

[31] https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#:~:text=All%20construction%20methods%20shall%20be%20in%20conformance%20with%20accepted%20engineering%20practices%20to%20insure%20durable%2C%20livable%2C%20and%20safe%20housing%20and%20shall%20demonstrate%20acceptable%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20various%20trades

[32] https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#:~:text=The%20strength%20and%20rigidity%20of%20the%20component%20parts%20and/or%20the%20integrated%20structure%20shall%20be%20determined%20by%20engineering%20analysis%20or%20by%20suitable%20load%20tests%20to%20simulate%20the%20actual%20loads%20and%20conditions%20of%20application%20that%20occur

[33] Qualification is performed by a legislatively defined Accreditation Body. ANSI National Accreditation Board (ANAB) is the largest independent accreditation body in North America and provides services in more than 75 countries. DrJ is an ANAB accredited product certification body.

[34] https://anabpd.ansi.org/Accreditation/product-certification/AllDirectoryDetails?prgID=1&orgID=2125&statusID=4#:~:text=Bill%20Payment%20Date-,Accredited%20Scopes,-13%20ENVIRONMENT.%20HEALTH

[35] See Code of Federal Regulations (CFR) Title 24 Subtitle B Chapter XX Part 3280 for definition: https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280

[36] 2021 IBC Section 104.11

[37] 2021 IRC Section R104.11

[38] 2018: https://up.codes/viewer/wyoming/ifc-2018/chapter/1/scope-and-administration#104.9 AND 2021: https://up.codes/viewer/wyoming/ibc-2021/chapter/1/scope-and-administration#104.11

[39] Approved is an adjective that modifies the noun after it. For example, Approved Agency means that the Agency is accepted officially as being suitable in a particular situation. This example conforms to IBC/IRC/IFC Section 201.4 (https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#201.4) where the building code authorizes sentences to have an ordinarily accepted meaning such as the context implies.

[40] https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1707.1

[41] Multilateral approval is true for all ANAB accredited product evaluation agencies and all International Trade Agreements.

Information contained in this report was developed using report holder's confidential intellectual property (IP) and trade secrets (TS), which is protected by Defend Trade Secrets Act 2016, © DrJ Engineering, LLC