



# Listing and Technical Evaluation Report™

A Duly Authenticated Report from an Approved Agency

Report No: 1011-04



Issue Date: April 24, 2014

Revision Date: March 11, 2026

Subject to Renewal: April 1, 2027

## Trussway Truss Reaction and Bearing Capacities for Proprietary Top Chord Bearing Floor Trusses

Trade Secret Report Holder:  
Trussway Industries, LLC

Phone: 713-691-6900

Website: [www.blldr.com](http://www.blldr.com)

### CSI Designations:

DIVISION: 06 00 00 - WOOD, PLASTICS AND COMPOSITES

Section: 06 02 00 - Design Information

Section: 06 05 23 - Wood, Plastic, and Composite Fastenings

Section: 06 11 00 - Wood Framing

Section: 06 17 00 - Shop-Fabricated Structural Wood

Section: 06 17 53 - Shop-Fabricated Wood Trusses

## 1 Code Compliance Process Evaluated<sup>1</sup>

1.1 Proprietary Truss Reaction and Bearing Capacities as Tested and Analyzed

## 2 Product Description and Materials

2.1 The code compliance process evaluated in this report applies to metal plate connected floor trusses designed and manufactured by Trussway Industries, LLC<sup>2</sup> as shown in **Figure 1**.



Figure 1. Trussway Floor Trusses



- 2.2 A Trussway top chord bearing floor truss is individually described on a Truss Design Drawing (TDD).
- 2.3 As needed, review material properties for design in **Section 6** and the regulatory evaluation in **Section 8**.

### 3 Definitions<sup>3</sup>

- 3.1 New Materials<sup>4</sup> are defined as building materials, equipment, appliances, systems, or methods of construction, not provided for by prescriptive and/or legislatively adopted regulations, known as alternative materials.<sup>5</sup> The design strength and permissible stresses shall be established by tests<sup>6</sup> and/or engineering analysis.<sup>7</sup>
- 3.2 Duly authenticated reports<sup>8</sup> and research reports<sup>9</sup> are test reports and related engineering evaluations that are written by an approved agency<sup>10</sup> and/or an approved source.<sup>11</sup>
  - 3.2.1 This report utilizes intellectual property and/or trade secrets to create public domain material properties for commercial end-use.
    - 3.2.1.1 This report protects confidential Intellectual Property and trade secrets under the regulation, 18.U.S.Code.90, also known as Defend Trade Secrets Act of 2016 (DTSA).<sup>12</sup>
- 3.3 An approved agency is “*approved*” when it is ANAB ISO/IEC 17065 accredited. DrJ Engineering, LLC (DrJ) is accredited and listed in the ANAB directory.
- 3.4 An approved source is “*approved*” when a professional engineer (i.e., Registered Design Professional, hereinafter RDP) is properly licensed to transact engineering commerce. The regulatory authority governing approved sources is the state legislature via its professional engineering regulations.<sup>13</sup>
- 3.5 Testing and/or inspections conducted for this duly authenticated report were performed by an ISO/IEC 17025 accredited testing laboratory, an ISO/IEC 17020 accredited inspection body, and/or a licensed RDP.
  - 3.5.1 The Center for Building Innovation (CBI) is ANAB<sup>14</sup> ISO/IEC 17025 and ISO/IEC 17020 accredited.
- 3.6 The regulatory authority shall enforce<sup>15</sup> the specific provisions of each legislatively adopted regulation. If there is a non-conformance, the specific regulatory section and language of the non-conformance shall be provided in writing<sup>16</sup> stating the nonconformance and the path to its cure.
- 3.7 The regulatory authority shall accept duly authenticated reports from an approved agency and/or an approved source with respect to the quality and manner of use of new materials or assemblies as provided for in regulations regarding the use of alternative materials, designs, or methods of construction.<sup>17</sup>
- 3.8 ANAB is an International Accreditation Forum (IAF) Multilateral Recognition Arrangement (MLA) signatory. Therefore, recognition of certificates and validation statements issued by conformity assessment bodies accredited by all other signatories of the IAF MLA with the appropriate scope shall be approved.<sup>18</sup> Thus, all ANAB ISO/IEC 17065 duly authenticated reports are approval equivalent,<sup>19</sup> and can be used in any country that is an MLA signatory found at this link: <https://iaf.nu/en/recognised-abs/>
- 3.9 Approval equity is a fundamental commercial and legal principle.<sup>20</sup>



## 4 Applicable Local, State, and Federal Approvals; Standards; Regulations<sup>21</sup>

### 4.1 *Local, State, and Federal*

- 4.1.1 Approved in all local jurisdictions pursuant to ISO/IEC 17065 duly authenticated report use, which includes, but is not limited to, the following featured local jurisdictions: Austin, Baltimore, Broward County, Chicago, Clark County, Dade County, Dallas, Detroit, Denver, DuPage County, Fort Worth, Houston, Kansas City, King County, Knoxville, Las Vegas, Los Angeles City, Los Angeles County, Miami, Nashville, New York City, Omaha, Philadelphia, Phoenix, Portland, San Antonio, San Diego, San Jose, San Francisco, Seattle, Sioux Falls, South Holland, St. Louis County, Texas Department of Insurance, and Wichita.<sup>22</sup>
- 4.1.2 Approved in all state jurisdictions pursuant to ISO/IEC 17065 duly authenticated report use, which includes, but is not limited to, the following featured states: California, Florida, New Jersey, Oregon, New York, Texas, Washington, and Wisconsin.<sup>23</sup>
- 4.1.3 Approved by the Code of Federal Regulations Manufactured Home Construction: Pursuant to Title 24, Subtitle B, Chapter XX, Part 3282.14<sup>24</sup> and Part 3280<sup>25</sup> pursuant to the use of ISO/IEC 17065 duly authenticated reports.
- 4.1.4 Approved means complying with the requirements of local, state, or federal legislation.

### 4.2 *Regulations*

- 4.2.1 *IBC – 18, 21, 24: International Building Code®*
- 4.2.2 *IRC – 18, 21, 24: International Residential Code®*

### 4.3 *Standards*

- 4.3.1 *TPI 1: National Design Standard for Metal-Plate-Connected Wood Truss Construction*

## 5 Listed<sup>26</sup>

- 5.1 Equipment, materials, products, or services included in a List published by a nationally recognized testing laboratory (e.g., CBI), an approved agency (e.g., CBI and DrJ), and/or and approved source (e.g., DrJ), or other organization(s) concerned with product evaluation (e.g., DrJ), that maintains periodic inspection (e.g., CBI) of production of listed equipment or materials, and whose listing states either that the equipment or material meets nationally recognized standards or has been tested and found suitable for use in a specified manner.



## 6 Tabulated Properties Generated from Nationally Recognized Standards

### 6.1 Allowable Trussway Floor Truss Reactions (R)

6.1.1 See Table 1, Table 2, Figure 2, Figure 3, Figure 4, and Figure 5.

**Table 1.** Alternate Table 7.4-1 Top Chord and Intermediate Height Bearing Limits for Trussway Floor Trusses<sup>1,2</sup>

Bearing Detail Figure 2 - Figure 4	Number of Top Chords	End Vertical Web	Top Chord	Maximum Allowable R (lb)	A <sup>2</sup>	B <sup>2</sup>	C <sup>2</sup>
7.4-1 (a)	1	1	4 x 21	600	1/2"	1/8"	1/8"
<b>Trussway 7.4-1 (a)</b>	2	0	4 x 21	1,000	1 1/2"	–	–
7.4-1 (b)	2	1	4 x 2	1,600	1/2"	1/8"	1/8"
7.4-1 (b)	2	1	3 x 2	1,150	1/2"	1/8"	1/8"
7.4-1 (c)	2	0	4 x 2	1,600	1/2"	1/8"	1/8"
7.4-1 (c)	2	0	3 x 2	1,150	1/2"	1/8"	1/8"
7.4-1 (d)	2	0	4 x 2	1,600	1/2"	–	1/8"
<b>Trussway 7.4-1 (d)</b>	2	0	4 x 2	2,000	1 1/2"	–	–
7.4-1 (d)	2	0	3 x 2	1,150	1/2"	–	1/8"

SI: 1 in = 25.4 mm, 1 lb = 4.45 N


- 3 x 2 extended chords shall be permitted with maximum allowable reactions of 430 lbs.
- Refer to Figure 2 to Figure 4 for location of dimensions.

**Table 2.** Top Chord and Intermediate-Height Bearing Limits for 45° Bearing Wall Conditions for Trussway Floor Trusses<sup>1</sup>


Bearing Detail Figure 5	Number of Top Chords	End Vertical Web	Top Chord	Maximum Allowable R (lb)	A1 <sup>1</sup>	A2 <sup>1</sup>	B	C
Trussway 7.4-1 (a) (AB)	2	0	4 x 2	1,000	1/2"	4"	-	-
<b>Trussway 7.4-1 (d) (AB)</b>	2	0	4 x 2	1,700	1/2"	4"	-	-

SI: 1 in = 25.4 mm, 1 lb = 4.45 N


- Refer to Figure 5 for location of dimension.

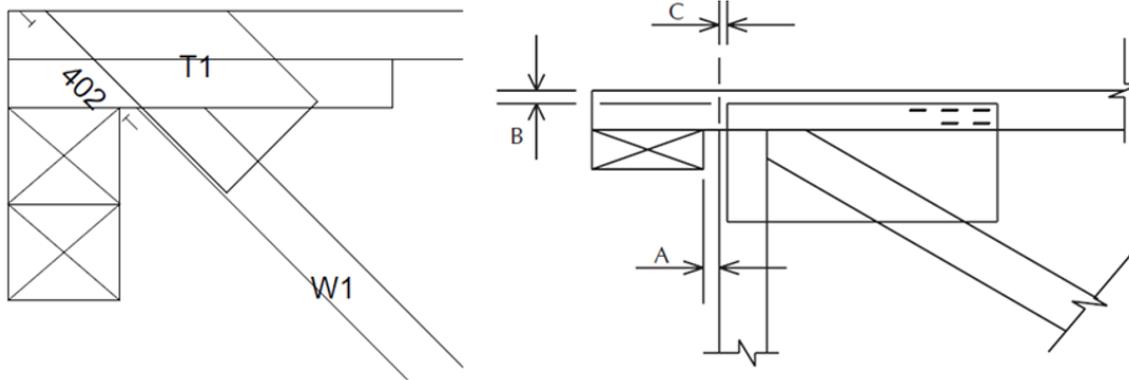


**Figure 2.** Trussway Alternative Bearing Detail (Left) and TPI 1 Figure 7.4-1(a) (Right)

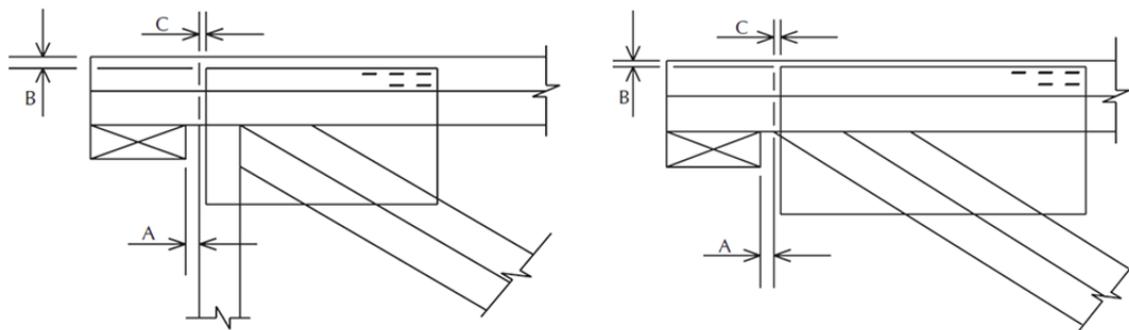

**Figure 3.** TPI 1 Figure 7.4-1(b) and Figure 7.4-1(c)

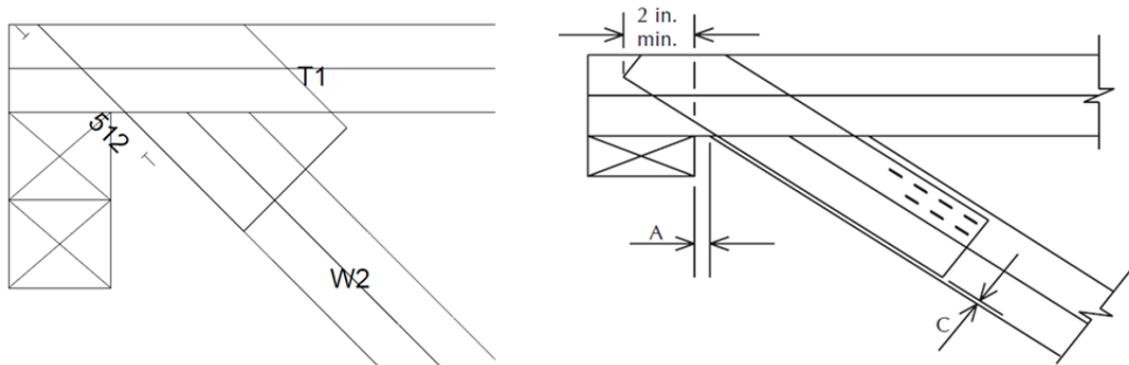

**Figure 4.** Trussway Alternative Bearing Detail (Left) and TPI 1 Figure 7.4-1(d) (Right)

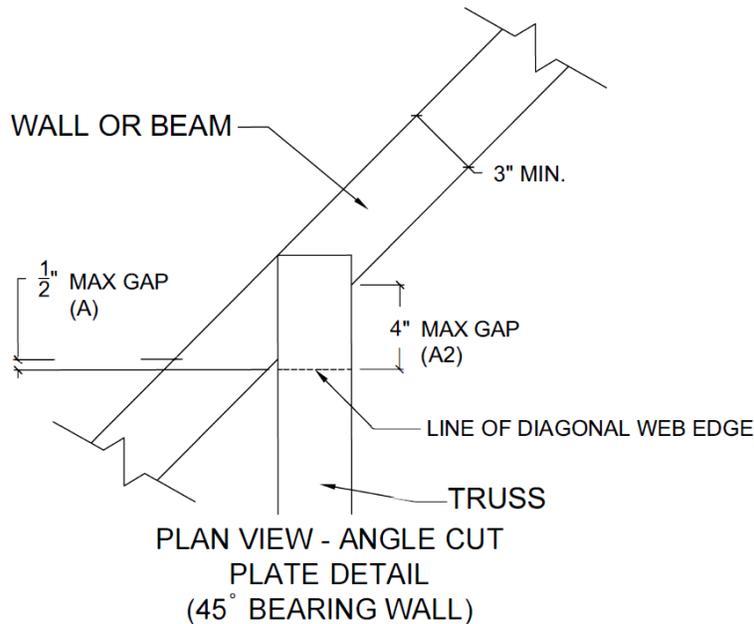

**Figure 5.** Trussway Alternative Angled Bearing Detail

(Angle Can Be Varied as Long as the Maximum A1 Gap is  $\frac{1}{2}$ " and A2 Gap is 4", or A1 is 4" and A2 is  $\frac{1}{2}$ " )

## 6.2 Truss Availability

6.2.1 Trussway proprietary and custom floor trusses are available in numerous configurations with spans, depths, and spacing designed specifically for a given project.

6.2.2 This application will be defined and shown on the Trussway TDD.

6.3 Alternative techniques shall be permitted in accordance with accepted engineering practice and experience. These provisions for the use of alternative materials, designs, and methods of construction are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed herein. This includes, but is not limited to, the following areas of engineering: mechanics of materials, structures, building science, and fire science.

## 7 Certified Performance<sup>27</sup>

7.1 All construction methods shall conform to accepted engineering practices to ensure durable, livable, and safe construction and shall demonstrate acceptable workmanship reflecting journeyman quality of work of the various trades.<sup>28</sup>

7.2 The strength and rigidity of the component parts and/or the integrated structure shall be determined by engineering analysis or by suitable load tests to simulate the actual loads and conditions of application that occur.<sup>29</sup>



## 8 Regulatory Evaluation and Accepted Engineering Practice

- 8.1 The Proprietary Truss Reaction and Bearing Capacities as Tested and Analyzed code compliance process complies with the following legislatively adopted regulations and/or accepted engineering practice for the following reasons:
- 8.1.1 Trussway has undertaken top chord bearing reaction tests on its proprietary floor truss connection details to provide improved floor truss end reaction capacities.
- 8.1.1.1 This testing provides the data needed to update TPI 1 Table 7.4-1 Top Chord and Intermediate Height Bearing Limits for proprietary use as defined herein.
- 8.1.1.2 These end reaction limits are for use exclusively by Trussway's engineering department.
- 8.1.1.2.1 The limits are based on the design methods developed through testing and analysis.
- 8.1.1.3 Trussway floor truss design will be performed using the methods found in TPI 1 and the tested performance methods as appropriate.
- 8.1.2 The design and manufacture of wood floor trusses follows the requirements defined in TPI 1 as referenced by IBC Chapter 35 and IRC Chapter 44.
- 8.1.3 IBC Chapter 23 – Wood:

### 2303.4 Trusses.

**2303.4.1 Design.** Wood trusses shall be designed in accordance with the provisions of this code and accepted engineering practice. Members are permitted to be joined by nails, glue, bolts, timber connectors, metal connector plates or other approved framing devices.

**2303.4.6 TPI 1 specifications.** In addition to Sections 2303.4.1 through 2303.4.5, the design, manufacture and quality assurance of metal-plate-connected wood trusses shall be in accordance with TPI 1. Job-site inspections shall be in compliance with Section 110.4, as applicable.

- 8.1.4 IRC Chapter 5 – Floors:

### R502.12 Wood trusses.

**R502.12.1 Design.** Wood trusses shall be designed in accordance with approved engineering practice. The design and manufacture of metal-plate-connected wood trusses shall comply with ANSI/TPI 1. The truss design drawings shall be prepared by a registered professional where required by the statutes of the jurisdiction in which the project is to be constructed in accordance with Section R106.1.

- 8.2 Any building code, regulation and/or accepted engineering evaluations (i.e., research reports, duly authenticated reports, etc.) that are conducted for this Listing were performed by DrJ, which is an ISO/IEC 17065 accredited certification body and a professional engineering company operated by RDP or approved sources. DrJ is qualified<sup>30</sup> to practice product and regulatory compliance services within its scope of accreditation and engineering expertise,<sup>31</sup> respectively.
- 8.3 Engineering evaluations are conducted with DrJ's ANAB accredited ICS code scope of expertise, which is also its areas of professional engineering competence.



## 9 Installation

- 9.1 Installation shall comply with the approved construction documents, the manufacturer installation instructions, this report, and the applicable building code.
- 9.2 In the event of a conflict between the manufacturer installation instructions and this report, contact the manufacturer for counsel on the proper installation method.
- 9.3 A copy of the Trussway TDD and any related installation details shall be available at all times on the jobsite during installation.
- 9.4 Overall design, installation and performance of Trussway floor trusses is outside the scope of this report.

## 10 Substantiating Data

- 10.1 Testing has been performed under the supervision of a professional engineer and/or under the requirements of ISO/IEC 17025, including additional calculations and analysis.
- 10.2 Information contained herein may include the result of testing and/or data analysis by sources that are approved agencies, approved sources, and/or an RDP. Accuracy of external test data and resulting analysis is relied upon.
- 10.3 Where applicable, testing and/or engineering analysis are based upon provisions that have been codified into law through state or local adoption of regulations and standards. The developers of these regulations and standards are responsible for the reliability of published content. DrJ's engineering practice may use a regulation-adopted provision as the control. A regulation-endorsed control versus a simulation of the conditions of application to occur establishes a new material as being equivalent to the regulatory provision in terms of quality, strength, effectiveness, fire resistance, durability, and safety.
- 10.4 The accuracy of the provisions provided herein may be reliant upon the published properties of raw materials, which are defined by the grade mark, grade stamp, mill certificate, or duly authenticated reports from approved agencies and/or approved sources provided by the supplier. These are presumed to be minimum properties and relied upon to be accurate. The reliability of DrJ's engineering practice, as contained in this duly authenticated report, may be dependent upon published design properties by others.
- 10.5 *Testing and Engineering Analysis*
  - 10.5.1 The strength, rigidity, and/or general performance of component parts and/or the integrated structure are determined by suitable tests that simulate the actual conditions of application that occur and/or by accepted engineering practice and experience.<sup>32</sup>
- 10.6 Where additional condition of use and/or regulatory compliance information is required, please search for Proprietary Truss Reaction and Bearing Capacities as Tested and Analyzed on the DrJ Certification website.

## 11 Findings

- 11.1 As outlined in **Section 6**, Proprietary Truss Reaction and Bearing Capacities as Tested and Analyzed have performance characteristics that were tested and/or meet applicable regulations. In addition, they are suitable for use pursuant to its specified purpose.
- 11.2 When used and installed in accordance with this duly authenticated report and the manufacturer installation instructions, Proprietary Truss Reaction and Bearing Capacities as Tested and Analyzed shall be approved for the following applications:
  - 11.2.1 The design and manufacture of wood floor trusses as defined in TPI 1 and referenced by IBC Section 2303.4 and IRC Section R502.11.
- 11.3 Any application specific issues not addressed herein can be engineered by an RDP. Assistance with engineering is available from Trussway Industries, LLC.



11.4 IBC Section 104.2.3<sup>33</sup> (IRC Section R104.2.2<sup>34</sup> and IFC Section 104.2.3<sup>35</sup> are similar) in pertinent part state:

**104.2.3 Alternative Materials, Design and Methods of Construction and Equipment.** The provisions of this code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by this code, provided that any such alternative is not specifically prohibited by this code and has been approved.

11.5 **Approved:**<sup>36</sup> Building regulations require that the building official shall accept duly authenticated reports.<sup>37</sup>

11.5.1 An approved agency is “*approved*” when it is ANAB ISO/IEC 17065 accredited.

11.5.2 An approved source is “*approved*” when an RDP is properly licensed to transact engineering commerce.

11.5.3 Federal law, Title 18 US Code Section 242, requires that, where the alternative product, material, service, design, assembly, and/or method of construction is not approved, the building official shall respond in writing, stating the reasons why the alternative was not approved. Denial without written reason deprives a protected right to free and fair competition in the marketplace.

11.6 DrJ is a licensed engineering company, employs licensed RDPs and is an ANAB Accredited Product Certification Body – Accreditation #1131.

11.7 Through the IAF Multilateral Arrangement (MLA), this duly authenticated report can be used to obtain product approval in any jurisdiction or country because all ANAB ISO/IEC 17065 duly authenticated reports are equivalent.<sup>38</sup>

## 12 Conditions of Use

12.1 As defined in **Section 6**, where material and/or engineering mechanics properties are created for load resisting design purposes, the resistance to the applied load shall not exceed the ability of the defined properties to resist those loads using the principles of accepted engineering practice.

12.2 When installed in accordance with this report, Trussway floor truss end reactions are rated for allowable load carrying capacities as defined herein.

12.3 Trussway floor truss end reactions may be used as part of a fire-resistance rated assembly in accordance with the fire assembly details and all local building code requirements.

12.4 Trussway TDD, Truss Placement Diagrams (TPD) and any related installation instructions shall be shipped to the jobsite with the Trussway trusses or otherwise be available on the jobsite for inspection.

12.5 Trussway trusses are manufactured in Houston, Texas; Fort Worth, Texas; Fountain, Colorado; Orlando, Florida; Fredericksburg, Virginia; and Acworth (Cartersville), Georgia under a quality control program with quality control inspections in accordance with TPI 1 - 2014 Section 3.1 and 3.2.

12.6 When required by adopted legislation and enforced by the building official, also known as the Authority Having Jurisdiction (AHJ) in which the project is to be constructed:

12.6.1 Any calculations incorporated into the construction documents shall conform to accepted engineering practice and, when prepared by an approved source, shall be approved when signed and sealed.

12.6.2 This report and the installation instructions shall be submitted at the time of permit application.

12.6.3 This code compliance process has an internal quality control program and a third-party quality assurance program.

12.6.4 At a minimum, this code compliance process shall be installed per **Section 9**.

12.6.5 The review of this report by the AHJ shall comply with IBC Section 104.2.3.2 and IBC Section 105.3.1.



- 12.6.6 This code compliance process has an internal quality control program and a third party quality assurance program in accordance with IBC Section 104.7.2, IBC Section 110.4, IBC Section 1703, IRC Section R104.7.2, and IRC Section R109.2.
- 12.6.7 The application of this code compliance process in the context of this report is dependent upon the accuracy of the construction documents, implementation of installation instructions, inspection as required by IBC Section 110.3, IRC Section R109.2, and any other regulatory requirements that may apply.
- 12.7 The approval of this report by the AHJ shall comply with IBC Section 1707.1, where legislation states in part, *“the building official shall make, or cause to be made, the necessary tests and investigations; or the building official shall accept duly authenticated reports from approved agencies in respect to the quality and manner of use of new materials or assemblies as provided for in Section 104.2.3”*, all of IBC Section 104, and IBC Section 105.3.
- 12.8 Design loads shall be determined in accordance with the regulations adopted by the jurisdiction in which the project is to be constructed and/or by the building designer (i.e., owner or RDP).
- 12.9 The actual design, suitability, and use of this report for any particular building, is the responsibility of the owner or the authorized agent of the owner.

### 13 Identification

- 13.1 The code compliance process, Proprietary Truss Reaction and Bearing Capacities as Tested and Analyzed, as listed in **Section 1.1**, is identified by a label on the board or packaging material bearing the manufacturer name, product name, this report number, and other information to confirm code compliance.
- 13.2 Additional technical information can be found at [www.blr.com](http://www.blr.com).

### 14 Review Schedule

- 14.1 This report is subject to periodic review and revision. For the latest version, visit [www.drjcertification.org](http://www.drjcertification.org).
- 14.2 For information on the status of this report, please contact [DrJ Certification](http://DrJ Certification).



# Notes

1 For more information, visit [drjcertification.org](http://drjcertification.org) or call us at 608-310-6748.

2 A division of Builders® FirstSource.

3 Capitalized terms and responsibilities are defined pursuant to the applicable building code, applicable reference standards, the latest edition of TPI 1, the NDS, AISI S202, US professional engineering law, Canadian building code, Canada professional engineering law, Qualtim External Appendix A: Definitions/Commentary, Qualtim External Appendix B: Project/Deliverables, Qualtim External Appendix C: Intellectual Property and Trade Secrets, definitions created within Design Drawings and/or definitions within Reference Sheets. Beyond this, terms not defined shall have ordinarily accepted meanings as the context implies. Words used in the present tense include the future; words stated in the masculine gender include the feminine and neuter; the singular number includes the plural and the plural, the singular.

4 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1702>

5 Alternative Materials, Design and Methods of Construction and Equipment: The provisions of any regulation code are not intended to prevent the installation of any material or to prohibit any design or method of construction not specifically prescribed by a regulation. Please review <https://www.justice.gov/atr/mission> and <https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#104.2.3>

6 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1706.2>:-:text=the%20design%20strengths%20and%20permissible%20stresses%20shall%20be%20established%20by%20tests

7 The design strengths and permissible stresses of any structural material shall conform to the specifications and methods of design of accepted engineering practice. <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1706.1>:-:text=Conformance%20to%20Standards-.The%20design%20strengths%20and%20permissible%20stresses.-of%20any%20structural

8 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1707.1>:-:text=the%20building%20official%20shall%20make%20or%20cause%20to%20be%20made%20the%20necessary%20tests%20and%20investigations%20and%20the%20building%20official%20shall%20accept%20duly%20authenticated%20reports%20from%20approved%20agencies%20in%20respect%20to%20the%20quality%20and%20manner%20of%20use%20of%20new%20materials%20or%20assemblies%20as%20provided%20for%20in%20Section%20104.2.3.

9 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1703.4.2>

10 [https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#approved\\_agency](https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#approved_agency)

11 [https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#approved\\_source](https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#approved_source)

12 <https://www.law.cornell.edu/uscode/text/18/1832> (b) Any organization that commits any offense described in subsection (a) shall be fined not more than the greater of \$5,000,000 or 3 times the value of the stolen trade secret to the organization, including expenses for research and design and other costs of reproducing the trade secret that the organization has thereby avoided. The federal government and each state have a public records act. To follow D TSA and comply state public records and trade secret legislation requires approval through ANAB ISO/IEC 17065 accredited certification bodies or approved sources. For more information, please review this website: [Intellectual Property and Trade Secrets](#).

13 <https://www.nspe.org/resources/issues-and-advocacy/professional-policies-and-position-statements/regulation-professional> AND <https://apassociation.org/list-of-engineering-boards-in-each-state-archive/>

14 <https://www.cbiteest.com/accreditation/>

15 <https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#104.1>:-:text=directed%20to%20enforce%20the%20provisions%20of%20this%20code

16 <https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#104.2.3> AND <https://up.codes/viewer/mississippi/ibc-2024/chapter/1/scope-and-administration#105.3.1>

17 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1707.1>

18 <https://iaf.nu/en/about-iaf-mia/#>:-:text=Once%20an%20accreditation%20body%20is%20a%20signatory%20of%20the%20IAF%20MLA%20it%20is%20required%20to%20recognise%20certificates%20and%20validation%20and%20verification%20statements%20issued%20by%20conformity%20assessment%20bodies%20accredited%20by%20all%20other%20signatories%20of%20the%20IAF%20MLA%20with%20the%20appropriate%20scope

19 True for all ANAB accredited product evaluation agencies and all International Trade Agreements.

20 <https://www.justice.gov/crt/deprivation-rights-under-color-law> AND <https://www.justice.gov/atr/mission>

21 Unless otherwise noted, the links referenced herein use un-amended versions of the 2024 International Code Council (ICC) 2024 International Code Council (ICC) model codes as foundation references. Mississippi versions of the IBC 2024 and the IRC 2024 are un-amended. This material, product, design, service and/or method of construction also complies with the 2000-2012 versions of the referenced codes and the standards referenced therein. As pertinent to this technical and code compliance evaluation, CBI and/or DrJ staff have reviewed any state or local regulatory amendments to assure this report is in compliance.

22 See [Adoptions by Publisher](#) for the latest adoption of a non-amended or amended model code by the local jurisdiction. <https://up.codes/codes/general>

23 See [Adoptions by Publisher](#) for the latest adoption of a non-amended or amended model code by state. <https://up.codes/codes/general>

24 <https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3282/subpart-A/section-3282.14>

25 <https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280>

26 <https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#p-3280.2>(Listed%20or%20certified); <https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#listed> AND <https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#labeled>

27 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1703.4>

28 <https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#>:-:text=All%20construction%20methods%20shall%20be%20in%20conformance%20with%20accepted%20engineering%20practices%20to%20insure%20durable%20livable%20and%20safe%20housing%20and%20shall%20demonstrate%20acceptable%20workmanship%20reflecting%20journeyman%20quality%20of%20work%20of%20the%20various%20trades

29 <https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280#>:-:text=The%20strength%20and%20rigidity%20of%20the%20component%20parts%20and/or%20the%20integrated%20structure%20shall%20be%20determined%20by%20engineering%20analysis%20or%20by%20suitable%20load%20tests%20to%20simulate%20the%20actual%20loads%20and%20conditions%20of%20application%20that%20occur



- 30 Qualification is performed by a legislatively defined Accreditation Body. ANSI National Accreditation Board (ANAB) is the largest independent accreditation body in North America and provides services in more than 75 countries. DrJ is an ANAB accredited product certification body.
- 31 <https://anabpd.ansi.org/Accreditation/product-certification/AllDirectoryDetails?prgID=1&orgID=2125&statusID=4#:~:text=Bill%20Payment%20Date-.Accredited%20Scopes,-13%20ENVIRONMENT.%20HEALTH>
- 32 See Code of Federal Regulations (CFR) Title 24 Subtitle B Chapter XX Part 3280 for definition: <https://www.ecfr.gov/current/title-24/subtitle-B/chapter-XX/part-3280>
- 33 2021 IBC Section 104.11
- 34 2021 IRC Section R104.11
- 35 2018: <https://up.codes/viewer/wyoming/ifc-2018/chapter/1/scope-and-administration#104.9> AND 2021: <https://up.codes/viewer/wyoming/ibc-2021/chapter/1/scope-and-administration#104.11>
- 36 Approved is an adjective that modifies the noun after it. For example, Approved Agency means that the Agency is accepted officially as being suitable in a particular situation. This example conforms to IBC/IRC/IFC Section 201.4 (<https://up.codes/viewer/mississippi/ibc-2024/chapter/2/definitions#201.4>) where the building code authorizes sentences to have an ordinarily accepted meaning such as the context implies.
- 37 <https://up.codes/viewer/mississippi/ibc-2024/chapter/17/special-inspections-and-tests#1707.1>
- 38 Multilateral approval is true for all ANAB accredited product evaluation agencies and all International Trade Agreements.